


# Rural Area Fence Section

## قسم سياج المناطق الريفية

### NOTES

1. INTERMEDIATE POSTS SHALL BE ROUND 60.3X 3.91MM OR SQUARE BELOW SECTION 50X50X4.0MM
2. END POSTS AND INTERMEDIATE STAINERS SECTION SHALL BE RECTANGULAR BELOW SECTION 100X50X4.0MM
3. CORNER POST SHALL BE RECTANGULAR BELOW SECTION 100X50X4.0MM
4. BRACES SHALL BE ROUND TUBE 42.2X3.56 OR SQUARE HOLLOW SECTION 50X50X4.0MM
5. ALL POSTS SHALL BE COVERED BY METAL OR PLASTIC COFS PRESSED ON TO THE POSTS.
6. ALL CONCRETE SHALL BE CLOSE K210 CONFORM TO THE REQUIREMENTS FOR SECTION 5.01 OF GENERAL SPECIFICATIONS AND FINISHED TO THE FINISH SHOWN.
7. ALL NUTS AND BOLTS SHALL BE GALVANIZED OR STAINLESS STEEL.
8. FOR POSTS DETAILS SEE DRAWING NUMBER PAC-18
9. IN SAND STONES AREA THE TOP OF THE CONCRETE FOOTING FOR POSTS SHALL BE SET 150MM BELOW THE NATURAL GROUND AND BACKFILLING IN ORDER TO HELP TO PREVENT WIND EROSION.
10. THE CONTRACTOR MAY HAVE THE OPTION OF DIGGING DEEPER SQUARE OR CIRCULAR POST HOLE ALL CIRCULAR HOLES SHALL BE DIAMETER THAT ARE EQUIVALENT TO THE WIDTH OF THE SQUARE DIMENSION.

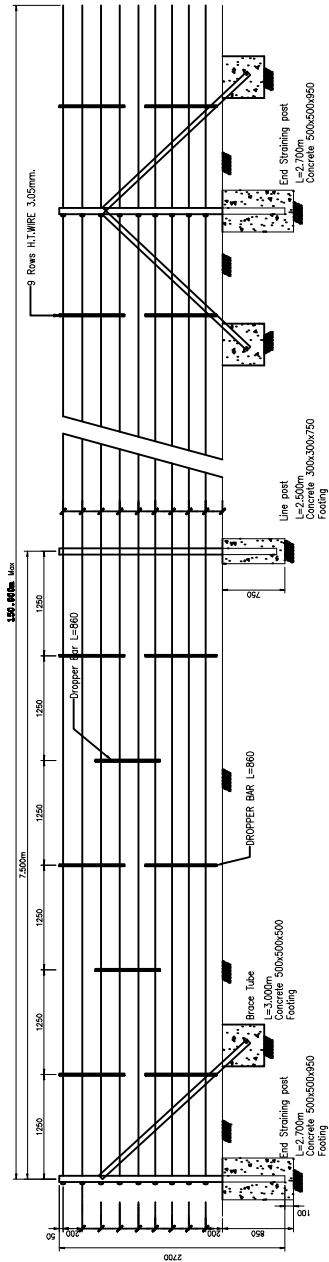

RURAL AREA FENCE SECTION

### MANUFACTURER



FAX 2914419, TEL 2064979, 0555015794, 0555015795, BR/008

FENCE TYPE: RURAL AREA FENCE SECTION

DESIGN:	SCALE:	AS SHOWN
DRAWN:	DATE:	10/10/13
CHECKED:	DWG. NO.:	
APPROVED:	JOB:	RURAL AREA FENCE SECTION
	REF.:	A